




# Volumetric flow controller VRAPPs

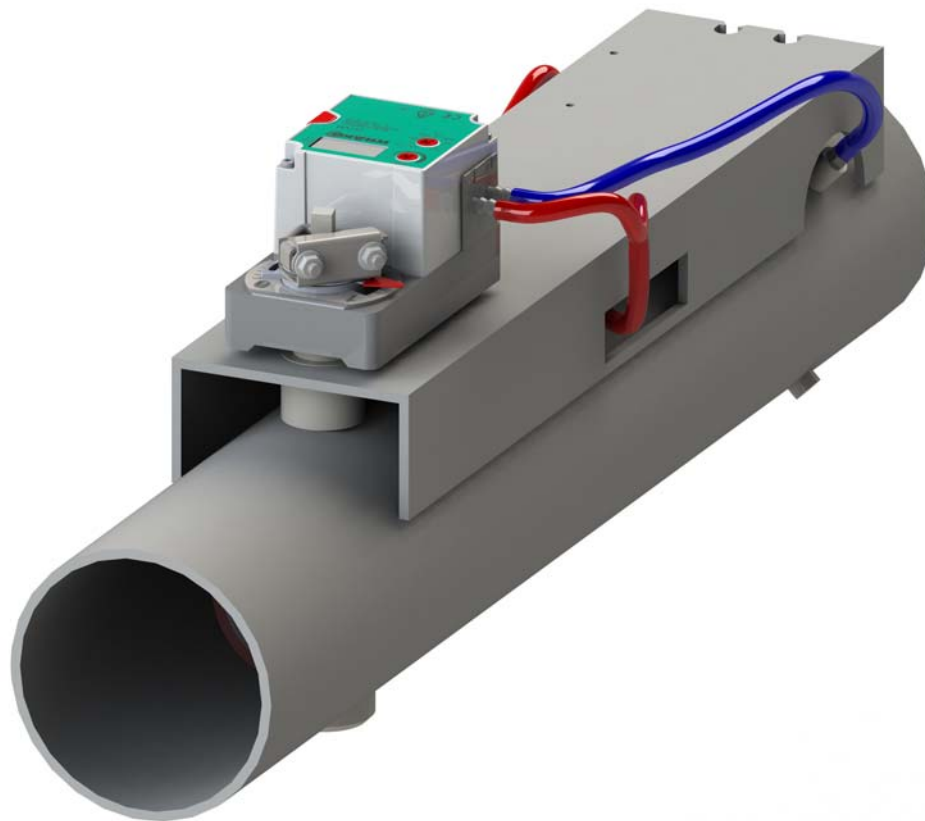

Ferdinand Schad KG  
Steigstraße 25-27  
D-78600 Kolbingen  
Telephone +49 (0) 74 63 - 980 - 0  
Fax +49 (0) 74 63 - 980 - 200  
[info@schako.de](mailto:info@schako.de)  
[schako.com](http://schako.com)

## Volumetric flow controller VRAPPs

### Contents

<b>Description</b> .....	<b>3</b>
Installation .....	4
Construction .....	4
Model .....	4
Accessories .....	4
<b>Models and dimensions</b> .....	<b>5</b>
Dimensions with Gruner controller (standard) .....	5
Dimensions with Belimo controller .....	5
<b>Technical data</b> .....	<b>6</b>
Volumetric flow range .....	6
Flow generated noise .....	7
Radiated noise .....	9
Circuit diagrams.....	11
Setting the operating potentiometers / calculation formulae .....	13
Technical data of controllers and motors .....	15
<b>Legend</b> .....	<b>18</b>
<b>Order code</b> .....	<b>19</b>
<b>Specification texts</b> .....	<b>20</b>

## Volumetric flow controller VRAPPs

### Description

The volumetric flow controller allows the volumetric flow in ducts to be kept constant or to be regulated using positive control  $V_{\min}$ ,  $V_{\max}$  or "CLOSED". The volumetric flow controller can also be used as a room or duct pressure regulator. In VAV systems the volumetric flow controller can regulate variable volumetric flows between  $V_{\min}$  and  $V_{\max}$  as a function of the supply air (room temperature controller).

**The round volumetric flow controller type VRAPPs made of plastic PPs is suitable for use with air contaminated with aggressive components.** The volumetric flow setpoints  $V_{\min}$  and  $V_{\max}$  can also be altered at the controller at a later stage, even after installation. If the changes in air volume are so large that the calibration curve must be changed, the controllers must either be recalibrated in-factory or the calibration curve must be changed on-site by the customer service of Schako.

Setpoints are initially set in-factory according to the customer's requirements. If these values are set ex factory, the functions of the volumetric flow controller are also checked. The  $V_{\min}$  and  $V_{\max}$  values can range from 20 to 100 %. The maximum deviation of the volumetric flows is +/- 5%, relative to the nominal volumetric flow  $V_{\text{neenn}}$ , based on a calibration curve of 12 m/sec. At lower flow rates, the deviation in percent may increase.

For the calibration of the controllers, a curve with a flow rate of 12 m/ sec is available. For constant-volume volumetric flow controllers, the  $V_{\min}$  value will be set to the desired constant-volume value.

If the calibration curve must be changed on site, the controllers must either be recalibrated ex factory or the calibration curve must be changed on site by the customer service of Schako.

Volumetric flow controllers are in general insensitive to the in-flow. 12 measuring points are distributed on the measuring cross according to the median line method. In comparison with measuring rods having only four measuring points or measuring orifices, this gives optimum measurement results.

When using the controllers in systems with heavy dust contamination, suitable filters must be connected upstream. For polluted air or air containing aggressive components, the volumetric flow controllers must be used with an integrated controller with a static membrane pressure sensor. In this case, the notice sign about installation must be observed.

**The volumetric flow controllers are not suitable for air containing sticky and greasy components.**

For maintenance, service, retrofitting, etc., inspection openings in sufficient number and size must be provided on site.

### Field of application

- for supply and return air systems
- for constant or variable volumetric flows
- Positive control  $V_{\min}$ ,  $V_{\max}$ , or "CLOSED"
- suitable for constant and variable volumetric flow or room pressure or duct pressure control
- Differential pressure range from 50 to 1000 Pa
- for duct velocities of 2 - 12 m/s
- for ambient temperatures from 0 to 55°C
- Digesters and contaminated media

### Construction

The user must check whether the materials used are suitable for the particular application.

### Model

Round design, for duct connection, with silicone-free damper leaf seal made of PUR (NW 110 sealing airtight to DIN EN 1751, Class 2), (NW 125-400 sealing airtight to DIN EN 1751, Class 3), Housing tightness class C to DIN EN 1751.

## Volumetric flow controller VRAPPs

### Installation


#### Installation information

To avoid unnecessary controller errors, the min. distances according to the following table / drawings must be observed. For combinations of several connection pieces or pieces with fire dampers or silencers, the larger minimum distances must be observed.

Distance to:


- Bent connection piece	1xD
- other connection pieces: (e.g. T-junction, branching piece, reduction piece, etc.)	2xD
- Fire damper	2xD
- Silencer	2xD

#### Distance to a bent connection spigot

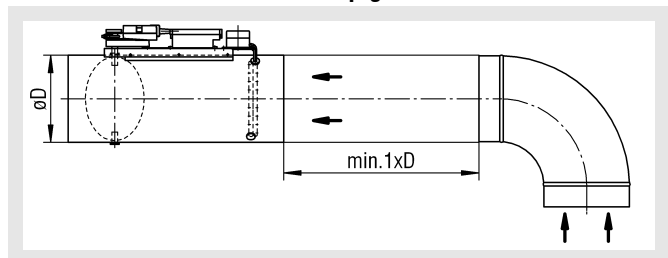


#### Distance to other connection pieces


(e.g. T-junction, branching piece, reduction piece, etc.)

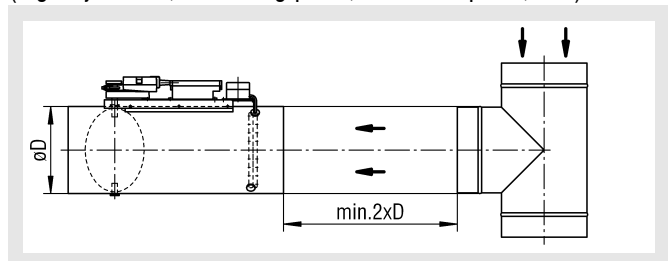

#### Distance to a fire damper

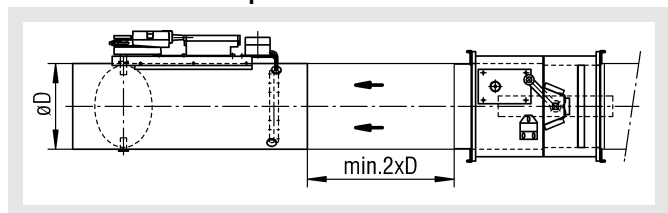

#### Distance to a silencer

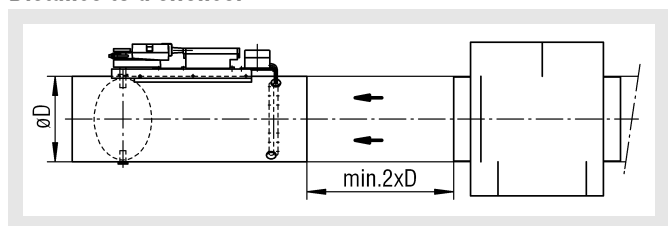

### Construction

Housing

- Plastic PPs

Damper axle

- Plastic PP

Damper blade

- Plastic PP

Damper leaf seal

- Silicone-free made of PUR (NW 110 sealing airtight to DIN EN 1751 Class 2, NW125 - 400 sealing airtight to DIN EN 1751 Class 3)

Measuring cross

- Plastic PP

Control and driving console

- Plastic PP

### Model

- VRAPPs
- round design, with plastic damper leaf with silicone-free damper leaf seal (NW 110 sealing airtight to DIN EN 1751 Class 2, NW 125-400 sealing airtight to DIN EN 1751 Class 3)
  - Housing tightness class C to DIN EN 1751.
  - with electric controller 227VM-024-10-DS3
  - ...-A-...
    - (standard)
    - Control voltage 24 V AC 50/60 Hz
    - alternatively with spring return actuator zero-current "CLOSED" or zero-current "OPEN" (at an extra charge).
    - alternatively with high-speed actuator running time 3-5 sec. for 90° angle of rotation (at an extra charge).

### Accessories


Flat flange (pair) (-FF3) (at an extra charge)

- on both sides
- made of plastic PPs


## Volumetric flow controller VRAPPs

### Models and dimensions

#### Dimensions with Gruner controller (standard)

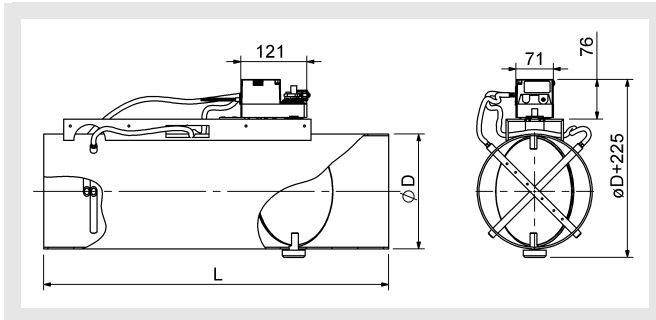

#### Dimensions with Belimo controller

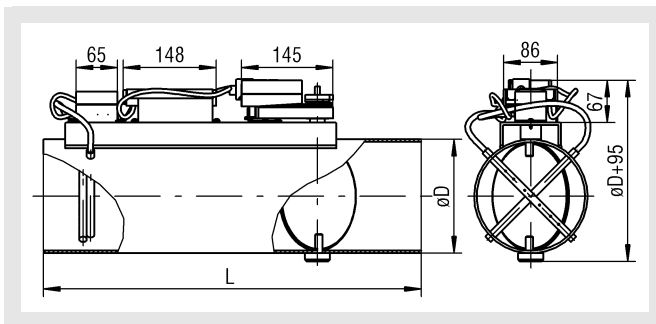


#### Available sizes

NW	øD	L
110	110	600
125	125	600
160	160	600
200	200	600
250	250	600
315	315	600
400	400	640

NW 110 sealing airtight to DIN EN 1751 Class 2  
 NW 125-400 sealing airtight to DIN EN 1751 Class 3

#### Dimensions of accessories

##### Flat flange (-FF3, pair) on both sides

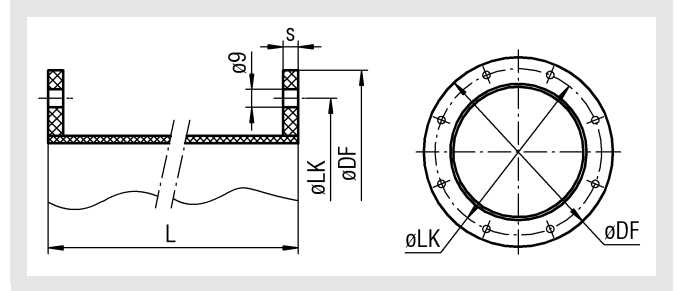

#### Available sizes

NW	øD	øDF	øLK	s	Number of holes
110	110	170	150	10	4
125	125	185	165	10	8
160	160	230	200	10	8
200	200	270	240	10	8
250	250	320	290	10	12
315	315	395	350	10	12
400	400	480	445	10	16

NW 110 sealing airtight to DIN EN 1751 Class 2  
 NW 125-400 sealing airtight to DIN EN 1751 Class 3

## Volumetric flow controller VRAPPs

### Technical data

#### Volumetric flow range

NW (mm)	V	Belimo/Gruner		
		Gruner $V_{\min}$ (1 m/s)	$V_{\min}$ (2 m/s)	$V_{\max}$ (12 m/s)
110	m <sup>3</sup> /h	31	61	367
	l/s	9	17	102
125	m <sup>3</sup> /h	40	80	480
	l/s	11	22	133
160	m <sup>3</sup> /h	67	134	804
	l/s	19	37	223
200	m <sup>3</sup> /h	107	213	1280
	l/s	30	59	356
250	m <sup>3</sup> /h	167	334	2004
	l/s	46	93	557
315	m <sup>3</sup> /h	263	526	3156
	l/s	73	146	877
400	m <sup>3</sup> /h	426	851	5108
	l/s	118	236	1419

For the parameter setting of the control components, an air density of 1.2 kg/m<sup>3</sup> has been taken into account.

#### Attention, the following specifications are important for the programming of the volumetric flow controllers:

- this table merely specifies the complete measuring range of the controller (volumetric flow range)
- If the customer absolutely wants a calibration curve different from 12 m/s, it must be specified! Once it is approved by the competent department, it can be adjusted correspondingly.
- When the air volume drops below the  $V_{\min}$  shown in the chart, the correct functioning of the volumetric flow controller is no longer guaranteed!
- If only one air volume is specified in the order (as  $V_{\max}$  value), the volumetric flow controller will be delivered as variable volumetric flow controller. The  $V_{\min}$  value will be set to the value specified in the catalogue.
- If only one air volume is specified in the order (as  $V_{\min}$  or  $V_{\text{konstant}}$  value or without value specification), then the volumetric flow controller will be delivered as a constant volumetric flow controller. The volume specified in the order is set to the  $V_{\min}$  value, and the  $V_{\max}$  value is set to 100%.
- The air volumes can be changed using setting devices specific for the controller make, depending on the calibration curve set ex works.
- The controller of the Gruner make, type 227V/VM Compact, can be used with a sensor linearized to an air velocity of 1 m/s.
- For the parameter setting of the control components (all controllers), an air density of 1.2 kg/m<sup>3</sup> has been taken into account.
- Belimo compact controllers are height-compensated. They are calibrated ex works to the system height in question of the specified installation site.
- If no system height is given in the order, the controllers will be set to the elevation of the delivery address.
- If the customer does not specify whether the "Parallel" or "Master/Slave" operating mode is desired, the controller is set for the parallel operation (Master/Slave mode only upon customer request).

## Volumetric flow controller VRAPPs

### Flow generated noise

Pressure loss 100-200 Pa

NW	v <sub>K</sub> (m/s)	V (m <sup>3</sup> /h) [l/s]			Δp <sub>t</sub> = 100 Pa								Δp <sub>t</sub> = 150 Pa								Δp <sub>t</sub> = 200 Pa										
					L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]	L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]	L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]
					f <sub>m</sub> (Hz)									f <sub>m</sub> (Hz)									f <sub>m</sub> (Hz)								
					63	125	250	500	1000	2000	4000	8000		63	125	250	500	1000	2000	4000	8000		63	125	250	500	1000	2000	4000	8000	
110	3	91	25	50	51	47	42	43	40	29	26	<b>47</b>	50	56	54	50	49	46	39	37	<b>53</b>	49	55	56	53	50	48	42	41	<b>56</b>	
	6	182	51	50	51	47	42	43	40	29	26	<b>47</b>	51	57	55	51	50	47	40	38	<b>54</b>	50	55	57	56	52	50	46	46	<b>58</b>	
	9	273	76	51	53	49	44	45	42	31	28	<b>49</b>	52	58	56	52	51	48	41	39	<b>55</b>	51	56	58	57	53	51	45	45	<b>59</b>	
	12	367	102	52	53	50	45	47	43	33	29	<b>50</b>	53	59	57	53	52	49	42	40	<b>56</b>	52	57	59	58	54	52	46	46	<b>60</b>	
125	3	120	33	51	52	48	43	42	41	30	27	<b>48</b>	50	56	54	50	49	46	39	37	<b>54</b>	49	55	56	53	50	48	42	41	<b>56</b>	
	6	240	67	52	55	50	44	44	39	34	31	<b>49</b>	53	59	57	53	52	49	42	40	<b>56</b>	55	61	59	55	54	51	44	42	<b>58</b>	
	9	360	100	60	56	51	45	45	40	35	32	<b>50</b>	53	59	57	53	52	49	42	40	<b>57</b>	52	57	59	58	54	52	46	46	<b>60</b>	
	12	480	133	54	55	51	46	47	44	33	30	<b>51</b>	51	57	58	55	52	50	44	43	<b>58</b>	54	59	61	60	56	54	48	48	<b>62</b>	
160	3	201	56	56	57	49	44	42	42	30	30	<b>48</b>	51	61	55	49	46	44	40	39	<b>53</b>	50	57	58	53	49	47	43	42	<b>56</b>	
	6	402	112	62	58	51	45	45	40	35	32	<b>50</b>	64	64	57	50	48	46	41	40	<b>55</b>	63	70	61	55	51	49	46	44	<b>59</b>	
	9	603	168	57	54	50	49	48	41	35	30	<b>52</b>	63	63	57	52	52	45	40	38	<b>56</b>	66	68	61	55	54	49	44	43	<b>59</b>	
	12	804	223	53	51	49	52	50	42	35	29	<b>53</b>	60	59	55	54	56	48	43	39	<b>59</b>	66	66	61	58	59	51	47	45	<b>62</b>	
200	3	320	89	52	51	47	44	43	41	33	30	<b>48</b>	49	54	52	48	46	45	41	40	<b>52</b>	49	61	56	53	49	49	46	45	<b>56</b>	
	6	640	178	60	55	51	47	46	42	35	30	<b>51</b>	61	59	55	50	48	46	41	39	<b>54</b>	60	63	59	54	51	50	47	45	<b>58</b>	
	9	960	267	57	54	52	50	51	42	36	30	<b>53</b>	63	60	57	53	53	47	42	37	<b>57</b>	66	64	61	56	54	51	46	43	<b>59</b>	
	12	1280	356	55	53	53	52	55	42	37	30	<b>54</b>	59	56	55	55	58	49	44	40	<b>60</b>	67	65	62	59	60	53	49	45	<b>63</b>	
250	3	501	139	51	50	47	45	43	45	36	28	<b>50</b>	51	53	52	48	46	48	43	36	<b>53</b>	51	55	56	51	48	50	48	42	<b>56</b>	
	6	1002	278	62	56	52	51	45	43	34	27	<b>52</b>	62	60	55	53	50	49	41	36	<b>56</b>	63	62	57	54	52	52	47	41	<b>58</b>	
	9	1503	418	58	55	53	53	46	43	36	32	<b>53</b>	65	61	58	57	50	48	41	37	<b>58</b>	66	65	61	59	53	51	45	41	<b>60</b>	
	12	2004	557	55	54	54	54	47	43	37	36	<b>54</b>	62	61	59	59	55	51	45	42	<b>60</b>	68	67	63	62	57	54	48	45	<b>63</b>	
315	3	738	205	60	61	53	48	45	45	33	33	<b>51</b>	61	58	56	56	49	46	39	35	<b>56</b>	63	62	57	54	52	52	47	41	<b>58</b>	
	6	1476	410	56	53	51	51	44	41	34	30	<b>51</b>	62	60	55	53	50	49	41	36	<b>56</b>	64	63	58	55	53	53	48	42	<b>59</b>	
	9	2214	615	58	55	53	53	46	43	36	32	<b>53</b>	63	61	56	54	51	50	42	38	<b>57</b>	65	63	58	56	53	52	44	40	<b>59</b>	
	12	3156	877	59	56	54	54	47	44	37	33	<b>54</b>	64	64	60	57	55	55	50	44	<b>61</b>	67	66	61	58	56	56	51	45	<b>62</b>	
400	3	1277	355	55	53	56	49	45	42	35	35	<b>52</b>	63	62	59	54	52	52	47	41	<b>59</b>	62	64	64	60	51	51	50	44	<b>61</b>	
	6	2554	709	53	54	57	48	46	43	35	35	<b>53</b>	60	64	60	55	52	52	47	41	<b>59</b>	60	65	63	61	51	51	50	46	<b>61</b>	
	9	3831	1064	56	57	55	51	48	43	36	32	<b>53</b>	60	63	59	54	51	51	45	41	<b>58</b>	65	64	60	58	56	56	52	46	<b>62</b>	
	12	5108	1419	56	57	55	51	48	44	36	33	<b>53</b>	60	62	60	55	51	51	45	41	<b>58</b>	65	65	59	60	55	56	52	46	<b>62</b>	

## Volumetric flow controller VRAPPs

### Flow generated noise

Pressure loss 250-500 Pa

NW	v <sub>K</sub> (m/s)	V (m <sup>3</sup> /h) [l/s]			Δp <sub>t</sub> = 250 Pa								Δp <sub>t</sub> = 500 Pa									
					L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]	L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]
					f <sub>m</sub> (Hz)									f <sub>m</sub> (Hz)								
					63	125	250	500	1000	2000	4000	8000		63	125	250	500	1000	2000	4000	8000	
110	3	91	25	50	55	57	56	52	50	44	44	58	50	55	55	59	58	52	44	44	61	
	6	182	51	52	57	59	58	54	52	46	46	60	55	60	61	63	56	52	48	46	63	
	9	273	76	54	59	60	59	55	53	47	47	62	55	62	66	64	56	56	50	46	65	
	12	367	102	53	58	59	58	54	52	46	46	61	53	66	64	67	56	56	50	46	66	
125	3	120	33	50	55	57	56	52	50	44	44	58	52	57	59	58	54	52	46	46	60	
	6	240	67	55	60	60	59	55	53	47	47	62	55	62	66	64	56	56	50	46	65	
	9	360	100	54	59	60	59	55	53	47	47	62	54	61	65	65	56	56	50	46	65	
	12	480	133	51	59	61	60	56	54	48	48	62	55	62	66	66	57	57	51	47	66	
160	3	201	56	49	58	62	58	52	51	46	46	60	50	58	61	62	56	56	49	49	63	
	6	402	112	62	69	64	58	54	51	50	48	61	52	60	63	65	56	56	49	49	65	
	9	603	168	66	72	64	58	55	52	47	46	62	56	67	66	67	58	58	45	46	67	
	12	804	223	68	69	65	60	59	53	49	48	64	60	70	71	69	62	60	54	46	70	
200	3	320	89	50	60	59	56	52	51	49	48	59	67	67	62	59	60	52	48	46	63	
	6	640	178	62	68	63	59	55	52	50	49	62	65	68	65	62	61	52	48	46	65	
	9	960	267	66	68	63	58	55	53	49	47	62	66	69	66	63	62	53	49	47	66	
	12	1280	356	66	64	64	60	59	55	51	48	64	69	72	69	66	65	56	50	49	69	
250	3	501	139	50	57	60	56	51	51	51	46	59	65	64	63	60	56	52	48	44	62	
	6	1002	278	61	64	60	56	53	54	51	46	61	68	69	65	61	57	55	51	47	64	
	9	1503	418	67	68	64	60	56	55	50	46	63	68	69	69	65	59	57	54	47	67	
	12	2004	557	69	69	65	62	57	55	50	47	64	68	71	72	69	65	57	54	49	70	
315	3	738	205	66	65	60	57	55	55	50	44	61	58	68	64	59	56	57	54	49	64	
	6	1476	410	65	62	60	62	56	57	48	45	63	58	69	67	63	57	58	55	49	66	
	9	2214	615	63	67	62	58	55	56	53	48	63	67	71	70	65	64	59	54	48	69	
	12	3156	877	69	68	63	60	58	58	53	47	64	67	74	73	68	67	63	57	51	72	
400	3	1277	355	66	65	62	59	57	55	51	45	63	69	68	65	62	60	58	54	48	66	
	6	2554	709	67	66	63	60	58	56	52	46	64	68	70	67	64	62	60	56	49	68	
	9	3831	1064	68	67	64	61	59	57	53	47	65	67	72	69	68	64	62	58	52	70	
	12	5108	1419	66	68	65	61	59	59	50	47	65	67	72	73	72	68	62	56	50	73	



## Volumetric flow controller VRAPPs

### Radiated noise

Pressure loss 100-200 Pa

NW	v <sub>K</sub> (m/s)	V (m <sup>3</sup> /h) [l/s]			Δp <sub>t</sub> = 100 Pa								Δp <sub>t</sub> = 150 Pa								Δp <sub>t</sub> = 200 Pa										
					L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]	L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]	L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]
					f <sub>m</sub> (Hz)									f <sub>m</sub> (Hz)									f <sub>m</sub> (Hz)								
					63	125	250	500	1000	2000	4000	8000		63	125	250	500	1000	2000	4000	8000		63	125	250	500	1000	2000	4000	8000	
110	3	91	25	25	18	17	22	17	22	17	20	<b>27</b>	26	19	18	23	28	23	18	21	<b>31</b>	24	25	21	19	23	30	27	23	<b>34</b>	
	6	182	51	24	20	19	22	18	22	18	20	<b>27</b>	26	22	22	25	29	25	18	21	<b>32</b>	30	26	26	29	33	29	22	25	<b>36</b>	
	9	273	76	25	21	21	24	28	24	17	20	<b>31</b>	31	28	27	30	34	30	23	26	<b>37</b>	32	30	33	32	35	32	25	30	<b>39</b>	
	12	367	102	24	25	21	19	23	30	27	23	<b>34</b>	34	32	35	34	37	34	27	32	<b>41</b>	36	36	39	38	41	38	34	32	<b>45</b>	
125	3	120	33	26	19	18	23	18	23	18	21	<b>28</b>	27	20	19	24	29	24	19	22	<b>32</b>	25	26	22	20	24	30	27	23	<b>34</b>	
	6	240	67	41	27	25	21	23	24	21	16	<b>29</b>	40	30	27	23	26	30	27	21	<b>34</b>	42	33	28	24	27	32	30	25	<b>36</b>	
	9	360	100	37	27	27	26	27	26	22	17	<b>32</b>	45	35	34	31	32	34	30	23	<b>39</b>	47	37	36	31	33	36	33	27	<b>40</b>	
	12	480	133	32	24	30	32	31	29	19	16	<b>35</b>	37	29	37	39	37	38	28	24	<b>43</b>	50	37	42	40	41	42	35	30	<b>47</b>	
160	3	201	56	24	20	19	22	18	24	19	22	<b>28</b>	27	23	22	25	21	27	22	25	<b>31</b>	30	23	25	28	24	30	25	28	<b>34</b>	
	6	402	112	26	22	21	24	20	26	21	24	<b>30</b>	29	22	24	27	26	29	24	27	<b>33</b>	33	26	28	31	30	33	27	31	<b>37</b>	
	9	603	168	32	26	25	30	24	29	24	27	<b>34</b>	36	30	29	34	28	33	28	31	<b>38</b>	37	31	30	35	29	34	29	32	<b>39</b>	
	12	804	223	36	29	28	34	27	31	26	29	<b>37</b>	46	35	39	45	38	35	28	20	<b>44</b>	47	36	40	46	39	36	29	21	<b>46</b>	
200	3	320	89	28	24	16	22	21	22	19	22	<b>28</b>	30	26	18	24	23	24	21	24	<b>30</b>	34	30	32	28	27	28	25	28	<b>34</b>	
	6	640	178	32	28	20	26	25	24	21	24	<b>31</b>	33	29	21	27	26	25	22	25	<b>32</b>	37	33	25	31	30	29	26	28	<b>36</b>	
	9	960	267	35	34	25	28	29	28	26	28	<b>35</b>	39	38	29	32	33	32	30	32	<b>39</b>	39	39	31	32	33	32	30	32	<b>39</b>	
	12	1280	356	37	38	29	29	32	31	30	31	<b>38</b>	43	45	38	38	41	38	35	38	<b>45</b>	46	48	41	41	44	41	38	41	<b>48</b>	
250	3	501	139	30	28	19	23	24	24	22	24	<b>30</b>	30	30	21	23	22	26	23	23	<b>31</b>	33	33	24	26	25	29	26	26	<b>34</b>	
	6	1002	278	31	31	22	24	23	27	24	23	<b>32</b>	32	30	25	24	25	28	28	28	<b>34</b>	36	34	24	29	30	29	27	30	<b>36</b>	
	9	1503	418	33	31	25	29	28	27	28	30	<b>35</b>	38	36	30	34	33	32	33	32	<b>40</b>	39	35	30	36	33	32	33	32	<b>40</b>	
	12	2004	557	34	31	27	33	32	27	31	35	<b>37</b>	40	41	40	39	41	38	32	32	<b>45</b>	43	44	43	42	44	41	35	35	<b>48</b>	
315	3	738	205	33	30	27	25	26	25	28	26	<b>33</b>	34	28	27	32	26	31	26	29	<b>36</b>	36	30	29	34	28	33	28	31	<b>38</b>	
	6	1476	410	31	25	24	29	23	28	23	26	<b>33</b>	31	28	25	29	24	28	23	26	<b>33</b>	36	33	31	35	32	33	29	31	<b>39</b>	
	9	2214	615	33	27	25	30	25	31	25	28	<b>35</b>	33	30	30	34	30	33	30	32	<b>39</b>	35	32	32	36	32	35	32	34	<b>41</b>	
	12	3156	877	34	28	26	31	26	33	26	29	<b>36</b>	47	40	38	43	39	41	38	38	<b>47</b>	48	41	39	44	40	42	39	38	<b>48</b>	
400	3	1277	355	35	30	29	27	26	29	25	26	<b>34</b>	35	35	34	32	31	34	30	31	<b>39</b>	37	38	36	34	34	35	32	32	<b>41</b>	
	6	2554	709	32	31	30	29	28	28	26	27	<b>35</b>	36	35	34	33	32	32	30	31	<b>39</b>	39	38	37	36	36	35	27	29	<b>41</b>	
	9	3831	1064	30	28	29	30	29	27	26	27	<b>35</b>	39	37	35	36	33	33	29	31	<b>40</b>	32	32	33	34	32	32	41	34	<b>44</b>	
	12	5108	1419	35	34	33	32	31	31	29	29	<b>38</b>	32	32	33	34	32	32	41	34	<b>44</b>	36	36	37	38	36	36	45	38	<b>48</b>	

## Volumetric flow controller VRAPPs

### Radiated noise

Pressure loss 250-500 Pa

NW	v <sub>K</sub> (m/s)	V (m <sup>3</sup> /h) [l/s]			Δp <sub>t</sub> = 250 Pa								Δp <sub>t</sub> = 500 Pa									
					L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]	L <sub>W</sub> [dB/oct]								L <sub>WA</sub> [dB(A)]
					f <sub>m</sub> (Hz)									f <sub>m</sub> (Hz)								
					63	125	250	500	1000	2000	4000	8000		63	125	250	500	1000	2000	4000	8000	
110	3	91	25	26	27	26	26	28	32	32	29	<b>36</b>	35	36	35	35	36	40	40	28	<b>45</b>	
	6	182	51	35	28	28	31	35	31	24	27	<b>38</b>	37	38	37	37	38	42	42	30	<b>47</b>	
	9	273	76	35	33	36	35	38	35	28	33	<b>42</b>	41	42	43	42	42	46	44	34	<b>51</b>	
	12	367	102	37	37	40	39	42	39	35	33	<b>46</b>	47	47	50	49	52	49	45	40	<b>56</b>	
125	3	120	33	35	25	24	24	26	30	30	27	<b>36</b>	35	36	32	30	34	40	37	33	<b>44</b>	
	6	240	67	47	35	31	28	30	36	34	30	<b>40</b>	56	46	42	39	41	47	45	41	<b>51</b>	
	9	360	100	49	38	36	31	33	37	35	30	<b>42</b>	58	47	45	40	42	46	44	39	<b>51</b>	
	12	480	133	51	40	43	40	42	41	36	31	<b>47</b>	60	49	52	49	51	50	45	40	<b>56</b>	
160	3	201	56	34	37	29	32	28	34	29	32	<b>38</b>	45	40	40	42	40	41	38	35	<b>47</b>	
	6	402	112	35	38	30	33	29	35	30	33	<b>39</b>	48	42	45	42	43	44	38	35	<b>49</b>	
	9	603	168	40	34	33	38	32	37	32	35	<b>42</b>	50	47	45	48	42	49	43	38	<b>53</b>	
	12	804	223	51	40	44	50	43	40	33	25	<b>49</b>	58	52	53	59	56	49	42	33	<b>60</b>	
200	3	320	89	35	30	30	32	31	31	28	31	<b>37</b>	46	39	41	43	42	39	38	34	<b>47</b>	
	6	640	178	40	38	31	38	32	32	32	30	<b>40</b>	49	47	40	47	41	41	40	38	<b>49</b>	
	9	960	267	40	42	35	35	38	35	33	35	<b>42</b>	52	51	44	45	48	45	43	45	<b>52</b>	
	12	1280	356	47	49	42	42	45	42	39	42	<b>49</b>	56	54	52	52	55	52	48	48	<b>59</b>	
250	3	501	139	37	34	27	29	28	32	29	29	<b>37</b>	45	42	39	38	39	40	40	39	<b>46</b>	
	6	1002	278	39	37	27	32	33	31	29	32	<b>39</b>	47	47	42	41	44	39	40	39	<b>48</b>	
	9	1503	418	39	39	38	36	39	38	32	32	<b>44</b>	50	52	47	46	49	44	44	45	<b>53</b>	
	12	2004	557	44	45	44	43	45	42	36	36	<b>49</b>	50	45	53	55	53	55	49	49	<b>60</b>	
315	3	738	205	41	35	34	39	33	38	33	36	<b>43</b>	44	44	42	41	42	45	42	37	<b>50</b>	
	6	1476	410	44	37	36	42	36	40	35	36	<b>45</b>	46	46	44	43	44	47	44	40	<b>52</b>	
	9	2214	615	46	39	38	44	38	42	37	38	<b>47</b>	49	49	47	46	47	50	47	43	<b>55</b>	
	12	3156	877	50	53	42	46	42	44	41	40	<b>50</b>	52	49	55	58	59	54	56	51	<b>63</b>	
400	3	1277	355	43	38	38	42	37	40	34	35	<b>45</b>	49	45	43	48	45	47	42	43	<b>52</b>	
	6	2554	709	44	44	43	44	42	38	30	32	<b>46</b>	52	55	50	49	48	46	46	42	<b>54</b>	
	9	3831	1064	46	42	40	45	42	44	39	40	<b>49</b>	54	57	52	51	50	48	48	44	<b>56</b>	
	12	5108	1419	39	39	40	41	39	39	48	42	<b>51</b>	60	52	55	59	59	55	56	51	<b>64</b>	


## Volumetric flow controller VRAPPs

### Circuit diagrams

#### Circuit diagram controller


#### Universal controller Belimo make VRP-VFP300

#### Connection diagram

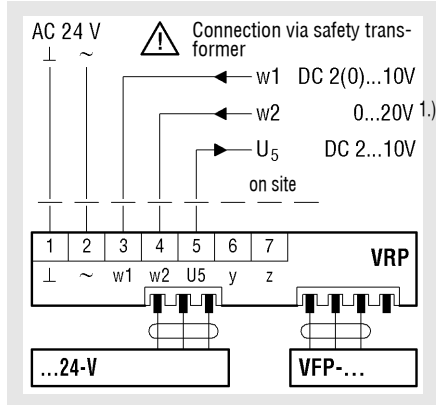


1.) Phase crossover

#### Positive control

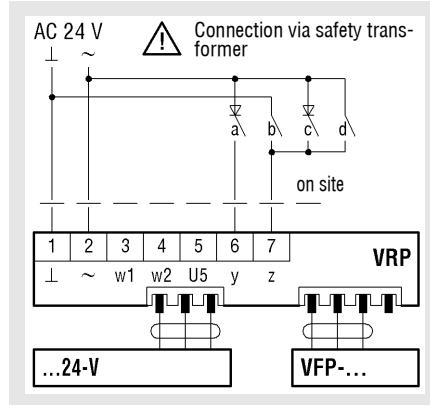

Function	a	b	c	d
CLOSED				
V <sub>min</sub>				
V <sub>max</sub>				
OPEN				


#### Two-stage volumetric flow rate control

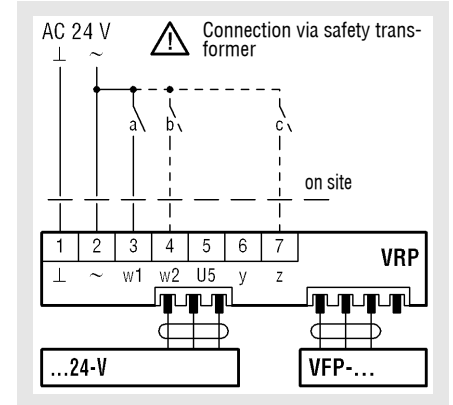

Function	a	b	c
V <sub>min</sub>			
V <sub>max</sub>			
V <sub>max</sub>			
V <sub>max</sub>			


#### Universal controller Belimo make VRP-STP

#### Connection diagram

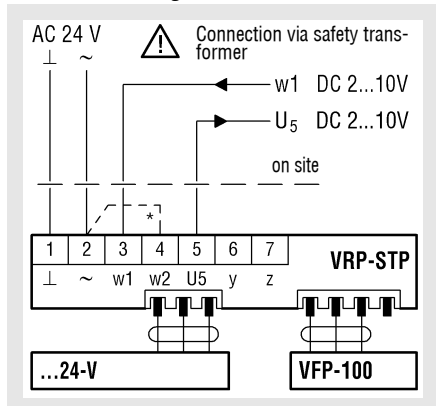

\* Wire bridge 2.4 assembled in-factory. Remove if external setpoint has been set!


#### Positive control

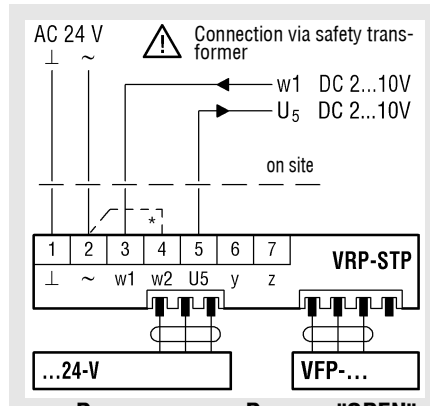

\* Wire bridge 2.4 assembled in-factory. Remove if external setpoint has been set!

#### Compact controller Belimo make VRP-M



#### Connection diagram

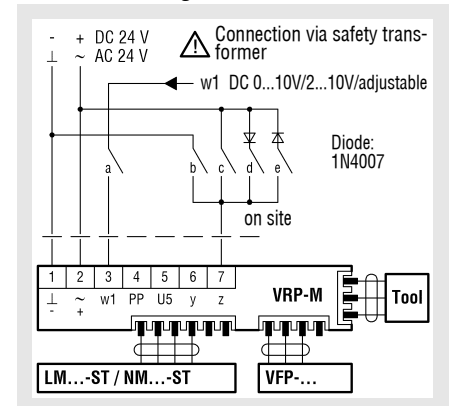

Function	a	b	c	d	e
CLOSED					
V <sub>min</sub>					
V <sub>min</sub> ... V <sub>max</sub>					
V <sub>mid</sub>					
V <sub>max</sub>					
OPEN					

## Volumetric flow controller VRAPPs

### Controller Gruner make 227VM Compact Connection diagram and positive control

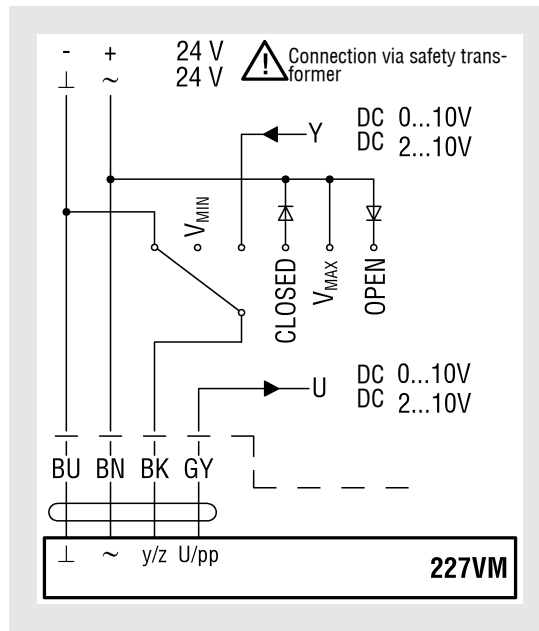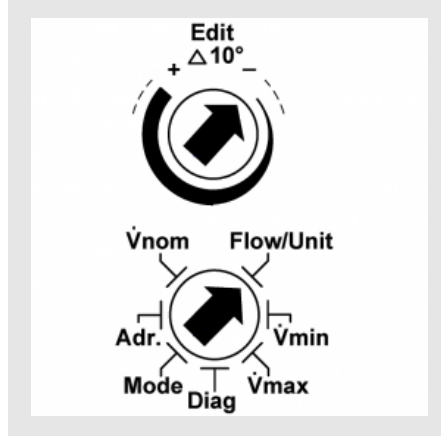

#### Edit

The selector value allows values to be changed. The position of the arrow shows the set value. The changes are displayed once the selector is moved  $\pm 10^\circ$  from its position.

#### Flow/Unit

To set the required actual volumetric flow unit in  $\text{m}^3/\text{h}$  and  $\text{l/s}$ .

#### Vmin

To set the required min. volumetric flow (setpoint value  $Y = 0\text{V} / 2\text{V}$ )

#### Vmax

To set the required max. volumetric flow (setpoint value  $Y = 10\text{V}$ )

#### Mode

To set the direction of rotation:

- 0-n...0-10 V normal
- 2-n...2-10 V normal
- 0-i...0-10 V inverse
- 2-i...2-10 V inverse

#### Diag (diagnostics menu:)

- oP - opens the damper leaf
- cL - closes the damper leaf
- Hi - activates Vmax
- Lo - activates Vmin
- on - Diagnostic mode is on, motor is off
- off - Diagnostic mode is off, display Y setpoint

#### Vnom

To set the volumetric flow according to VAV box

## Volumetric flow controller VRAPPs

### Setting the operating potentiometers / calculation formulae

#### Set value for $V_{\max}$

$$EW_{V_{\max}} = \frac{V_{\max}}{V_{\text{nenn}}} \times 100\%$$

The required volumetric flow which should flow at the 10 V DC command signal at terminal 3 (w/Y) or with positive control  $V_{\max}$  is set in % at the  $V_{\max}$  potentiometer of the controller (VRP), the ZTH device (VRP-M) or PC tool (VRP-M). This value refers to the set  $V_{\text{nenn}}$  nominal volumetric flow.

#### Set value for $V_{\min}$

$$EW_{V_{\min}} = \frac{V_{\min}}{V_{\text{nenn}} \text{ oder } V_{\max}} \times 100\%$$

The required volumetric flow which should flow at the 0 V DC command signal (operating mode 0-10 V DC) or at the 2 V DC driving signal (operating mode 2 - 10 V DC) at terminal 3 (w/Y) or with positive control  $V_{\min}$  is set in % at the  $V_{\min}$  potentiometer of the controller (VRP, the ZTH device (VRP-M) or PC tool (VRP-M). This value refers to the set  $V_{\text{nenn}}$  or  $V_{\max}$  volumetric flow (depending on controller type).

#### Information regarding the set value $V_{\min}$

In the following controllers,  $V_{\min}$  refers to  $V_{\max}$ :

Make	Type
Belimo	VRP-VFP

in the following controllers,  $V_{\min}$  refers to  $V_{\text{nenn}}$ :

Make	Type
Belimo	VRP-M
Gruner	227VM-024-10-DS3

#### Calculation of the $U_5$ voltage value

##### Operating mode: 2 - 10 V DC:

$$U_5 = \frac{V_{\max}}{V_{\text{nenn}}} \times 8V + 2V \quad V_{\max} \text{ values}$$

$$U_5 = \frac{V_{\min}}{V_{\text{nenn}}} \times 8V + 2V \quad V_{\min} \text{ values}$$

##### Operating mode: 0 - 10 V DC:

$$U_5 = \frac{V_{\max}}{V_{\text{nenn}}} \times 10V \quad V_{\max} \text{ values}$$

$$U_5 = \frac{V_{\min}}{V_{\text{nenn}}} \times 10V \quad V_{\min} \text{ values}$$

#### Calculation of the $V_{\text{nenn}}$ volumetric flow

$$V_{\text{nenn}} = EK \times F \times 3600$$

#### Attention:


The  $V_{\text{nenn}}$  value changes as a function of the set calibration curve.

- EW (%) = Set value
- EK (m/s) = Calibration curve
- $U_5$  (V DC) =  $U_5$  signal
- F (m<sup>2</sup>) = Area

## Volumetric flow controller VRAPPs

Actual value measurement via feedback signal  $U_5$  using a voltmeter or PC tool


### Terminal assignment VRP-VFP / VRP-M-VFP

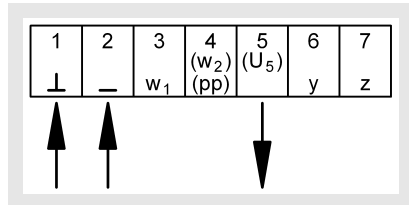

Supply voltage: 24 V AC/DC (terminals 1+2)  
 Measurement output 2 - 10 V DC (terminals 1+5)  
 Measurement output 0 - 10 V DC (terminals 1+5) (only possible with VRP-M)


The actual value signal  $U_5$  is a real feedback of the volumetric flow actual value for monitoring and controlling the air through-put volume.

### 227VM-024-10-DS3



Supply voltage 24 V AC/DC (terminals 1+2)  
 Measurement output 2 - 10 V DC (terminals 1+4)  
 Measurement output 0-10 V DC (terminals 1+4)

### $U_5$ signal 0-10 V DC

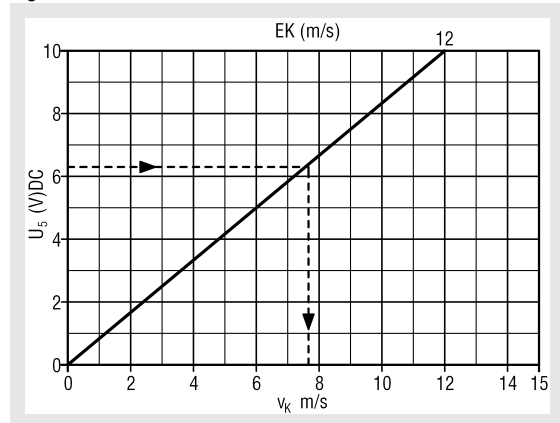


### Example

Assume: Measurement output signal  $U_5 = 6.3$  V DC  
 Calibration value VRAPPs = 12 m/sec

Measured value: Duct velocity = 7.6 m/s

Air volume: Duct velocity x area  $m^2$  x 3600 =  $m^3/h$

### $U_5$ signal 2-10 V DC

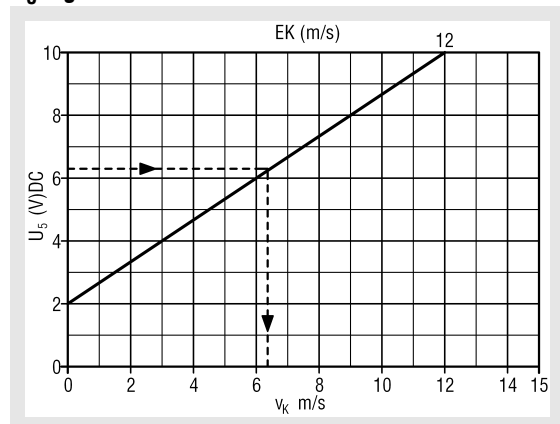

### Example

Assume: Measurement output signal  $U_5 = 6.3$  V DC  
 Calibration value VRAPPs = 12 m/sec

Measured value: Duct velocity = 6.3 m/s

Air volume: Duct velocity x area  $m^2$  x 3600 =  $m^3/h$

## Volumetric flow controller VRAPPs

### Technical data of controllers and motors

#### VRP-VFP (make Belimo)

For static differential pressure control with separately available sensors VFP-100, 300 or 600

Measuring principle:	Pressure measurement with metal membrane
Measuring range sensor:	0...100 Pa, 0...300 Pa or 0...600 Pa
Supply voltage:	AC 24 V 50/60 Hz;
Power consumption:	1.3 W (incl. sensor VFP-..., without actuator)
Dimensioning:	2.6 VA (incl. sensor VFP-..., without actuator)
Command variable w:	-
Command variable w1:	DC 2-10 V (input resistance 100 k $\Omega$ )
Command variable w2:	0-20 V phase crossover (input resistance 8 k $\Omega$ )
Operating range:	DC 2-10 V
Volumetric flow:	DC 2-10 V
Actual value signal U <sub>5</sub> :	-
Torque:	-
Sound power level:	-

#### VRP-STP (make Belimo)

For static differential pressure control with separately available sensors VFP-100

Supply voltage:	AC 24 V 50/60 Hz;
Power consumption:	1.3 W (incl. sensor VFP-..., without actuator ...-24 V)
Dimensioning:	2.6 W (incl. sensor VFP-..., without actuator ...-24 V)
Command variable w1:	DC 2...10 V @ input resistance 100 k $\Omega$
Operating range:	DC 2...10 V
Actual value signal U <sub>5</sub> :	DC 2...10 V @ max. 0.5 mA (signal linear, corresponds to 0...100% $\Delta p$ )
Setting ranges	
- Standard value:	25...100% FS sensor (factory setting = 100%. Example VFP-300: FS = 300 Pa = 100%)
- Setpoint value:	30...100 % of the set standard value ( $\Delta p$ )
Protection class:	III (safety extra low voltage)
Degree of protection:	IP42
Ambient temperature:	0...+50°C
Storage temperature:	-20...+80°C

#### VFP-100 (make Belimo)

Supply voltage:	DC 15 V (of the controller VRP...)
Measuring range:	7.5...100 Pa (zero points can be set)
Overload protection:	up to 500 Pa
Measuring principle:	Differential pressure measurement by membrane (inductive)
Output signal:	DC 0...10 V (as a linear function of the pressure for controller VRP...)
Linearity:	$\pm 1$ % of the end value (FS)
Hysteresis:	0.1 % typ.
Temperature dependence:	
- Zero point	$\pm 0.1\%/K$
- Measuring range:	$\pm 0.1\%/K$
	t = +10...+40°C (reference temperature T <sub>0</sub> = 25°C)
Mounting position:	Vertical (i.e. hose connecting piece top, lateral or bottom)
Position dependence:	Max. $\pm 4.5$ Pa upon rotation by 90° around the horizontal axis
Pressure connection:	Hose connecting piece for hose internal diameter $\varnothing 4...6$ mm
Electric connection:	Cable 1 m, with 4-pin plug., to fit controller VRP...
Protection class:	III (safety extra low voltage)
Degree of protection:	IP42
Ambient temperature:	0...+50°C
Storage temperature:	-10...+80°C

## Volumetric flow controller VRAPPs

### Controller standard

#### 227VM-024-10-DS3 (make Gruner)

Static pressure sensor, digital VAV controller and damper drive as a communication-capable VAV compact solution.

Measuring principle:	static pressure measurement
Measuring range:	0...~300Pa; (bursting pressure 1 bar)
Sensor:	Supply voltage AC 24 V 50/60 Hz; DC 24 V
Installation:	position-independent
Functional range:	AC 19...29 V; DC 19...29V
Power consumption:	2.5 W (10 Nm)
Dimensioning:	4.5 VA (10 Nm)
Torque:	min. 10 Nm at the rated voltage
Control function:	VAV/CAV; Supply/return air or stand-alone operation master/slave parallel circuit Mixing box control
Setting range:	$V_{\min}=0...100\%$ of $V_{\text{nom}}$ $V_{\max}=0...100\%$ of $V_{\text{nom}}$ $V_{\text{konst.}}=0...100\%$ of $V_{\text{nom}}$
Command variable Y/Z: (inherent resistance min. 100 k $\Omega$ )	DC 0-10 V (0-20 mA min. 500 $\Omega$ input resistance) DC 2-10 V (4-20 mA min. 500 $\Omega$ input resistance)
Setting range: (actual value signal U/ PP)	DC 0-10 V DC 2-10 V
Bus function:	PP bus (open PP protocol) (Modbus RTU optional)
DDC controller:	DDC controller / or PLC
Sensor connection:	Passive and active sensors (0-10V) for example, humidity, temperature 2-point signal (switching power 16 mA @ 24 V), for example switch, motion detec- tor
Protection class:	III (Safety extra low voltage)
Degree of protection:	IP54 (measuring hoses connected)
Measuring air and ambi- ent temp.:	0-70°C (medium), 5-95% rel. 0-50°C (environment)
Storage temperature:	-20° C to +80° C
Switching capacity level:	<35 dB(A)
Operation and service:	Using the display by means of a screwdriver directly at the device or via the feedback signal
Communication:	PP bus, max. 15 VDC, 1200 Baud
Connection:	Cable 1000 m, 4 x 0.75 mm <sup>2</sup> (halogen-free), terminals
Dimensions:	115 x 65 x 61 mm
Weight:	approx. 460 g
Maintenance:	maintenance-free

#### VRP-M (make Belimo)

Self-adapting digital VAV controller, with external static pressure sensor and external damper actuator as a communication-capable VAV or CAV solution (e.g. applications including high-speed actuators)

Measuring principle:	Pressure sensor for static effective pressure measurement
Measuring range sensor:	VFP-100: 0...100 Pa (room pressure controls) VFP-300: 0...300 Pa (standard volumetric flow controls) VFP-600: 0...600 Pa (duct pressure controls)
Supply voltage:	AC 24 V 50/60 Hz; DC 24 V
Functional range:	AC +/- 20%, DC +/- 10%
Power consumption:	1.1 W
Dimensioning:	2.6 VA
Control function:	VAV/CAV/Open Loop; Supply/return air or stand-alone operation; master/slave parallel circuit; Mixing box control
Setting range $V_{\min}/V_{\max}$ :	$V_{\min} = 0...100\%$ of set $V_{\max}$ volumetric flow $V_{\max} = 30...100\%$ of set $V_{\text{nenn}}$ volumetric flow
Command variable w/Y : (Input resistance min. 100 k $\Omega$ )	DC 2-10 V (4...20 mA with 500 $\Omega$ input re- sistance) DC 0-10 V (0...20 mA with 500 $\Omega$ input re- sistance)
Setting range actual val- ue signal $U_5$ :	DC 2...10 V DC 0...10V
MP bus function	
Address in bus mode :	MP 1 ... 8 (traditional operation: PP)
LONWORKS® / EIB Konnex:	with BELIMO interface UK24LON / UK24EIB, 1 ... 8 BELIMO MP devices (VAV / flap drive/ valve)
DDC controller:	DDC controller / PLC from different manu- facturers, with integrated MP interface
Fan Optimiser:	BELIMO Optimiser COU24-A-MP
Sensor connection:	Passive (Pt1000, Ni1000, etc.) and active sensors (0...10 V), for example tempera- ture, humidity, 2-point signal (switching power 16 mA @ 24 V), for example switch, presence detector
Protection class:	III (safety extra low voltage)
Degree of protection:	IP 42
Measuring air and ambi- ent temperatures:	0° C...+50° C, 5...95% rH, non-condensing
Storage temperature:	-20° C...+80° C
Operation and service:	Plug-in via service socket / VRP-M-Tool
Communication:	PP/MP bus, max. DC 15V, 1200 baud



## Volumetric flow controller VRAPPs

### GUAC-SM3/SCH (make Gruner)

Digital VAV controller, with static pressure sensor, position-independent als communication-capable universal solution.

Measuring principle:	static differential pressure measurement
Measuring range sensor:	0...~300 Pa (bursting pressure 1 bar)
Supply voltage:	AC 24 V 50/60 Hz, DC 24 V
Functional range:	AC 19...29 V, DC 19...29 V
Power consumption:	0.5 W (without actuator)
Dimensioning:	1.5 VA (without actuator)
Control function:	VAV/CAV; Supply/return air or stand-alone operation; master/slave or parallel circuit
Setting range $V_{min}$ to $V_{max}$ :	$V_{min}=0...100\%$ of $V_{nom}$ $V_{max}=0...100\%$ of $V_{nom}$ $V_{konst.}=0...100\%$ of $V_{nom}$
Command variable Y/Z: (Inherent resistance at least 100 k $\Omega$ )	DC 0-10 V (0-20 mA at least 500 $\Omega$ input resistance) DC 2-10 V (4-20 mA at least 500 $\Omega$ input resistance)
Setting range (actual value signal U/PP):	DC 0-10 V DC 2-10 V
DCC controller:	DCC controller or PLC
Sensor integration:	passive or active sensors (0-10V) for example, humidity, temperature 2-point signal (switching power 16 mA @ 24 V), for example switch, motion detector
Protection class:	III (Safety extra low voltage)
Degree of protection:	IP54 (measuring hoses connected)
Measuring air and ambient temp.:	0-70°C (medium) 0-50° C (environment), 5-95% rel. humidity non-condensing
Storage temperature:	-20 °C to +80 °C
Sound power level:	<35 dB(A)
Operation and service:	on the display, using a screwdriver directly at the device or via feedback signal/service plug using PC software
Connection:	Cable 1000 mm, 4 x 0.75 mm <sup>2</sup> (halogen-free), terminals
Dimensions:	124 x 71.5 x 66.5 mm
Weight:	approx. 175 g
Maintenance:	maintenance-free

### Damper drives...24-

#### for VRP-VFP, VRP-STP, VRP-M

##### LM24A-V

Supply voltage:	AC 24V 50/60 Hz / DC 24V of VR..., ready to plug in
Power consumption/ Dimensioning:	2 W / 3.5 VA
Actuator signal:	DC 6.0 V $\pm$ 4V (of VR...)
Torque at Rated voltage:	Min. 5 Nm
Running time for 90° (or 95°):	150 s.
Degree of protection:	IP54
Protection class:	III (safety extra low voltage)
Sound power level:	max. 35 dB (A)

##### SF24A-V (-ST for VRP-M only), (spring return actuator)

Supply voltage:	AC 24V 50/60 Hz / DC 24V of VR..., ready to plug in
Power consumption/ Dimensioning:	7.5 W / 10 VA
Actuator signal:	DC 6.0 V $\pm$ 4V (of VR...)
Torque at the Rated voltage:	20 Nm
Running time for 90° (or 95°):	Drive 150 s, spring return: 20 s
Degree of protection:	IP54
Protection class:	III (safety extra low voltage)
Sound power level:	Drive max. 40 dB(A) / Spring max. 62 dB(A)

##### NMQ24A-SRV-ST (only for VRP-M), (high-speed damper drive)

Supply voltage:	AC 24V 50/60 Hz / DC 24V of VRP-M..., ready to plug in
Power consumption/ Dimensioning:	12 W / 18 VA
Actuator signal:	DC 6.0 V $\pm$ 4V (of VR...)
Torque at the Rated voltage:	Min. 8 Nm
Running time for 90° (or 95°):	4 s.
Degree of protection:	IP54
Protection class:	III (safety extra low voltage)
Sound power level:	max. 52 dB (A)

##### NM24A-V-ST (for VRP-M only)

Supply voltage:	AC 24V 50/60 Hz / DC 24V of VRP-M..., ready to plug in
Power consumption/ Dimensioning:	3.5 W / 6 VA
Actuator signal:	DC 6.0 V $\pm$ 4V (of VR...)
Torque at the Rated voltage:	Min. 10 Nm
Running time for 90° (or 95°):	150 s.
Degree of protection:	IP54
Protection class:	III (safety extra low voltage)
Sound power level:	max. 35 dB (A)

## Volumetric flow controller VRAPPs

**Damper drives...24-** (make Gruner)  
for **GUAC-SM3/SCH**

### 328CS-024-10B-V/ST06

High-speed drive, ready to be plugged in for GUAC-... with position feedback

Supply voltage:	AC 24V 50/60 Hz, DC 24V
Functional range:	AC 19...29 V, DC 19...29 V
Power consumption:	18 W (in motion)
Dimensioning:	22 VA
Torque:	> 10 Nm (at the rated voltage)
Running time for 90°:	<3 sec.
Activation:	6 ± 4 V DC (from GUAC)
Protection class:	III (safety extra low voltage)
Degree of protection:	IP42
Ambient temperature:	-30 to 50 °C, 5-95% of relative humidity non-condensing
Storage temperature:	-30 °C to +80 °C
Sound power level:	< 55 dB(A)
Manual adjustment:	Gears are disengaged by pushbutton, self-restoring
Connection:	Cable 1000 mm with Lumberg plug
Dimensions:	172.5 x 65 x 90 mm
Weight:	approx. 790 g
Maintenance:	maintenance-free

### 361C-024-10-V

Spring return actuator, ready to be plugged in for GUAC-...

Supply voltage:	AC 24V 50/60 Hz, DC 24V
Functional range:	AC 19...29 V, DC 19...29 V
Power consumption:	5 W (in motion)
Dimensioning:	8 VA
Torque:	> 10 Nm (at the rated voltage)
Spring torque:	> 10 Nm
Running time for 90°:	< 150 sec. (motor) < 20 sec. (spring)
Activation:	6 ± 4 V DC (from GUAC)
Protection class:	III (safety extra low voltage)
Degree of protection:	IP54
Ambient temperature:	-30 to 50 °C, 5-95% of relative humidity non-condensing
Storage temperature:	-30 °C to +80 °C
Sound power level:	< 35 dB(A) (motor) < 65 dB(A) (spring)
Manual adjustment:	Manual winding with lock
Connection:	Cable 1000mm with Phönix plug
Dimensions:	193 x 96 x 60 mm
Weight:	approx. 1,800 g
Maintenance:	maintenance-free

## Controller selection

Electrical controllers:	Actuator:
- Belimo VRP-VFP 300	NM24A-V
- Belimo VRP-VFP 300	SF24A-V (spring return actuator)
- Belimo VRP-M-VFP 300: (MP-bus-capable)	NM24A-V-ST NMQ24A-SRV-ST (high-speed damper drive) SF24A-V-ST (spring return actuator)
- Gruner 227VM-024-10-DS3	Compact (standard)
- Gruner GUAC-SM3/SCH	328CS-024-10B-V/ST06 (high-speed damper drive) 361C-024-10-V (spring return actuator)

## Accessories:

- integrated ES Belimo S1
- integrated ES Belimo S2
- integrated potentiometer Belimo P1

## Attention

The volumetric flow controllers type VRAPPs are used for air contaminated with aggressive components. For this reason, the Belimo controllers VRP-VFP, VRP-M or the Gruner controller of type 227VM-024-10-DS3 are installed in the electric volumetric flow controllers. In these controllers, the air volume throughput is measured using a static differential pressure measurement. A membrane integrated in the controller measures the pressure and prevents air flow to the measuring unit. This considerably reduces the risk of damage.

Due to the integrated membrane, the Belimo aneroid diaphragm must be installed in the correct position (non-horizontal mounting position)!

The Gruner controllers have a static differential pressure sensor which can be used irrespective of the position!

## Legend

$v_K$	(m/s)	= Duct velocity
$\Delta p_t$	(Pa)	= Pressure loss
$V$	(m <sup>3</sup> /h)	= Volumetric flow
$V$	[l/s]	= Volumetric flow
$f_m$	(Hz)	= Octave centre frequency
$L_W$	[dB/oct]	= Sound power level / octave
$L_{WA}$	[dB(A)]	= A-weighted sound power level
$L$	(mm)	= Length
$NW$	(mm)	= Nominal width

## Volumetric flow controller VRAPPs

### Order code

01	02	03	04	05	06	07	08
Type	Nominal width	Attachment assembly	Mode	Volumetric flow $V_{\min} / V_{\text{kon}}$	Volumetric flow $V_{\max}$	Duct connection	Damper position
<b>Example</b>							
VRAPPs	-110	-A067	-0	-0100	-0350	-KA0	-NA

### Sample

**VRAPPs-110-A067-2-0100-0350-KA0-NA**

Volumetric flow controller type VRA-PPs, round design, made of PPs | NW 110 mm | with 227VM-024-10-DS3 | mode 0-10 V |  $V_{\min}$ = 100 m<sup>3</sup>/h |  $V_{\max}$ = 350 m<sup>3</sup>/h | butted, without flange | no spring return actuator

### Order details

#### 01 - Type

VRAPPs = Volumetric flow controller, round design, made of PPs

#### 02 – Nominal width

110 = NW 110 mm  
 125 = NW 125 mm  
 160 = NW 160 mm  
 200 = NW 200 mm  
 250 = NW 250 mm  
 315 = NW 315 mm  
 400 = NW 400 mm

#### 03 - Attachment assembly

A067 = 227VM-024-10-DS3 (standard)  
 A069 = GUAC-SM3/SCH with 361C-024-10-V (spring return)  
 A071 = GUAC-SM3/SCH with 328CS-024-10B-V (high-speed damper drive)  
 A017 = VRP/VFP300 with NM24A-V  
 A019 = VRP/VFP300 with LF24-V (spring return)  
 A041 = VRP-M/VFP300 with NM24A-V-ST  
 A044 = VRP-M/VFP300 with NMQ24A-SRV-ST (high-speed damper drive)

#### 04 - Mode

0 = 0-10 V  
 2 = 2-10 V

#### 05 - Volumetric flow set value $V_{\min}/V_{\text{kon}}$

0000 = ex-works, according to table  
 xxxx = 4-digit value in m<sup>3</sup>/h

#### 06 - Volumetric flow set value $V_{\max}$

0000 = ex-works, according to table  
 xxxx = 4-digit value in m<sup>3</sup>/h

#### 07 - Duct connection

KA0 = butted, without flange (standard)  
 FF3 = flat flange (pair), on both sides, PPs

#### 08 - Damper position

NA = no spring return actuator (standard)  
 NO = currentless OPEN  
 NC = currentless CLOSED  
 (only for drives with spring return)

#### Please note!

Counter flanges and duct silencers must be ordered separately!

## Volumetric flow controller VRAPPs

### Specification texts

Volumetric flow rate controllers for use in supply/return air systems for constant or variable volume flow, room or duct pressure control. Also suitable for use in digesters or with air containing aggressive media. With positive control  $V_{\min}$ ,  $V_{\max}$  or "CLOSED". Permitted pressure difference range: 20-1000 Pa, permitted surrounding temperatures 0-55° C. For use with duct velocities of 1-12 m/s (only Gruner 227 VM). It is possible to subsequently adjust the ex-factory set operational volumetric flows (type Gruner, setting directly at the controller via the potentiometer without Service tool). The output signal can be used for master/slave or parallel operation of several controllers or for actual value display 2-10 V DC which corresponds to 0-100 % of the set  $V_{\max}$  or 0(2)-10 V which corresponds to 0-100% of  $V_{\text{nein}}$  in DDC / ZLT systems.

Housing made of plastic PPs. Damper blade, damper axle and measuring cross made of plastic PP. Controller and drive console made of plastic PP. With electric controller (227VM-024-10-DS3), control voltage 24 V AC, 50/60 Hz, temperature compensation of 10-40 °C, wired and adjusted ex factory.

Damper blade seal silicone-free made of PUR (NW 110 sealing airtight to DIN EN 1751 Class 2, NW 125 - 400 sealing airtight to DIN EN 1751 Class 3).

Housing tightness class C to DIN EN 1751.

Product: SCHAKO type **VRAPPs**

Size .....

- with Gruner compact controller (standard)
  - 227VM-024-10-DS3
  
- with Gruner universal controller GUAC-SM3/SCH (at an extra charge)
  - 328CS-024-10B-VISIT06 (with high-speed damper drive)
  - 361C-024-10-V (spring return actuator)
    - currentless CLOSED
    - currentless OPEN
  
- with MP-bus-capable controller (at an extra charge)  
VRP-M-VFP300 / NM24A-V-ST
  
- with high-speed actuator drive (at an extra charge)  
VRP-M-VFP 300 / NMQ24A-SRV-ST
  
- with spring return actuator (at an extra charge):  
VRP-VFP 300 / SF24A-V  
VRP-M-VFP 300 / SF24A-V-ST (MP-bus-capable)
  - currentless "CLOSED"
  - currentless "OPEN"

Accessories (at an extra charge):

- Flat flange (pair), on both sides, made of plastic PPs (-FF3)